Tecknaro™

Systems Tools Cheat Sheet

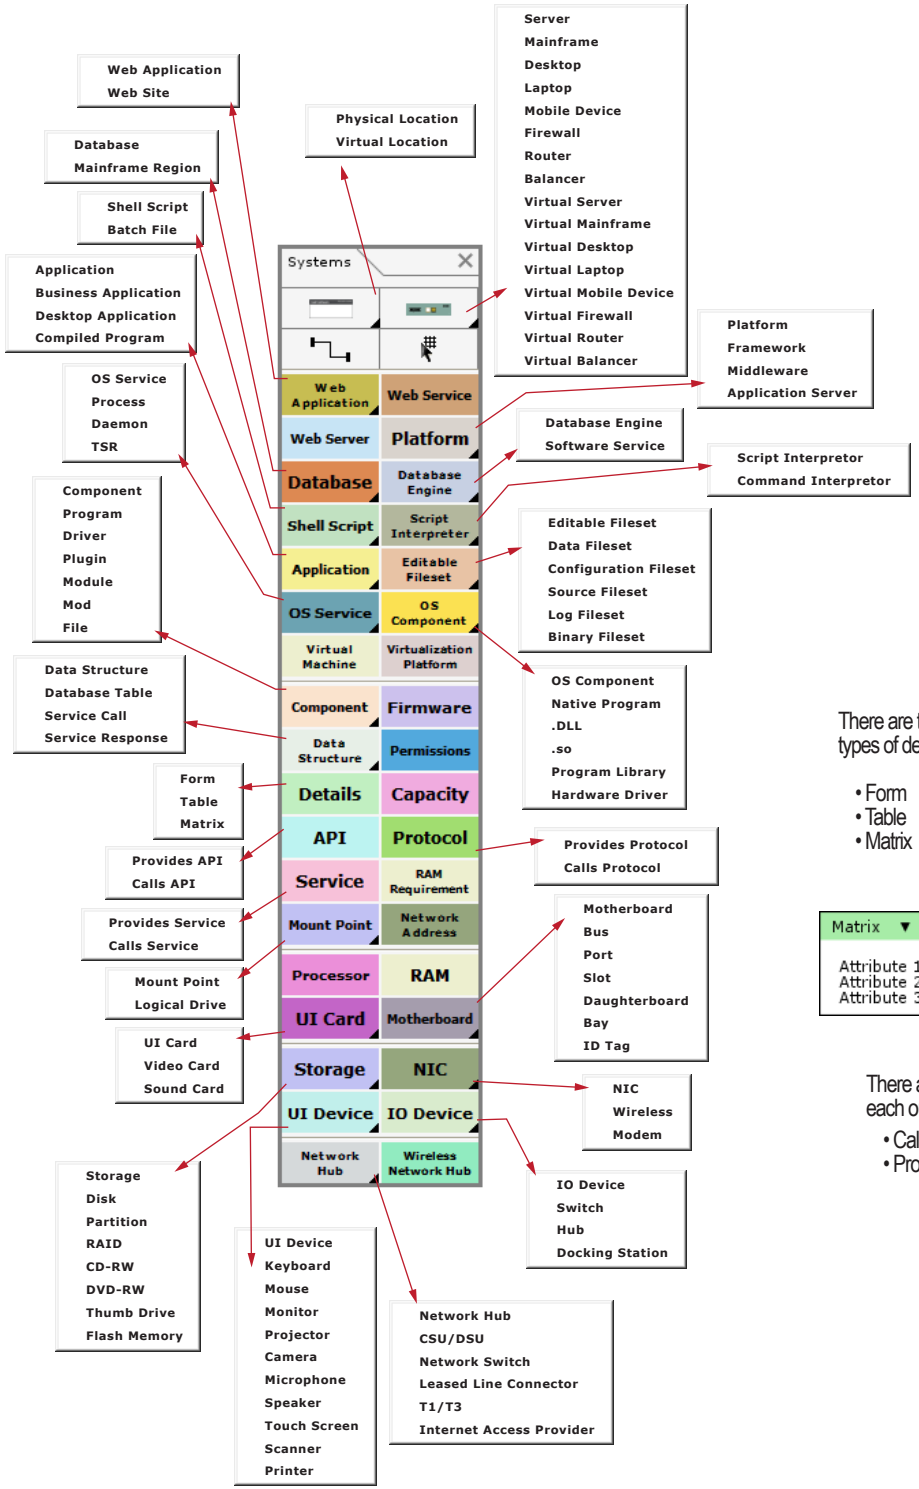

Makes a location mingus. A location mingus **can live** on the canvas alone, or inside another location mingus.

Makes a systems mingus. A systems mingus **can live** on the canvas alone, or inside a location mingus.

Make software minguses. Software minguses **can live** only inside the software containers of system minguses.

Makes a component mingus. A component mingus, **can live** only inside software minguses.

Makes a firmware mingus. A firmware mingus, is the only software mingus that **can live** inside a hardware mingus.

There are three different types of detail mingus:

- Form
- Table
- Matrix

FORM ▼ Details

Attribute 1	
Attribute 2	
Attribute 3	

TABLE ▼ Details

Value 1	Value 2	Value 3

Matrix ▼ Details

	Heading 1	Heading 2	Heading 3
Attribute 1			
Attribute 2			
Attribute 3			

Make inner annotation minguses. Inner annotation minguses **can live** inside software or hardware minguses.

Make outer annotation minguses. Outer annotation minguses **can live** attached to the sides of all software minguses except Editable Fileset and Virtual Machine.

There are two different types of each outer annotation mingus:

- Calls
- Provides

jdbc ▶ Protocol

jdbc ▶ Protocol

Make OS annotation minguses. OS annotation minguses **can live** inside the OS container or inside a hardware mingus.

Make internal hardware minguses. Internal hardware minguses **can live** inside the hardware container of system minguses or inside other hardware minguses.

Make general hardware minguses. General hardware minguses **can live** on the canvas alone, inside a location mingus, inside the hardware container of system minguses, or inside other hardware minguses

tan-P™